


EAG IPF-2000 Precision Filtration System

PRODUCT DESCRIPTION

Grinder Coolant Recirculation, Filtration thru 1um filter and Temperature Control Unit. High power pump enables multiple unit connections, filter change notification and easy maintenance filter replacement.

TECHNICAL DATA

Specification		EAG IPF-2000
Filtration Pump	Motor Capacity	1 HP
	Flow Rate	60 liters / min.
	Maximum Head Pressure	220 meters
Supply Pump	Motor Capacity	0.5 HP
	Flow Rate	180 liters / min.
	Maximum Head Pressure	7 meters
Cooling Capacity		3,000 Kcal / h
Temperature Control		10°C ~ 45°C
Minimum Particle Size Filtration Capacity		1 um
Tank Size		Incoming Water Tank (Prefiltration): 180 liters Outgoing Water Tank (Filtrated): 125 liters
System Dimension		830 mm x 1,330 mm x 1,500 mm
Wight		500kg

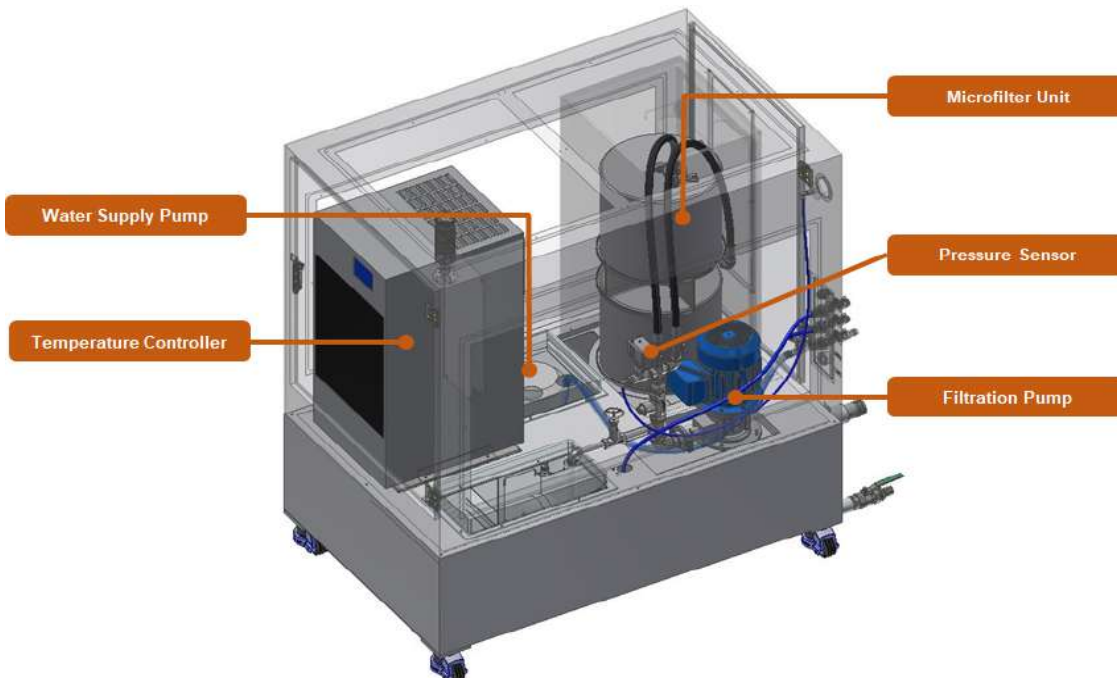



Lapping & Polishing



Superabrasive Tools



Bore Honing Systems



Engis® offers state-of-the-art technology in the design of flat lapping systems that meet the most demanding requirements.

Superabrasive Powders




We offer a complete range of superabrasive electroplated products for precision applications.

Mold & Die Polishing



Multi-Stroke Honing, Single-Pass Bore Finishing & Single-Pass Dual Bore Finishing Systems, Complete Machine Design, Tools & Process Development

Engis Global Presence

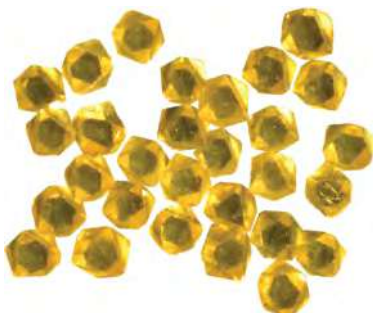

We manufacture high-quality micron diamond & CBN with properties that ensure consistent performance in each application



Engis® long trusted brands include Five-Star® diamond compound.



US Engis Corporation



Engis of Canada, Ltd.



Engis Japan Co., Ltd.



Engis (Hong Kong) Ltd.



Engis Lapping & Grinding Technology Co., Ltd.



Engis Korea Co., Ltd.



Engis Asia Pacific Pte. Ltd.



Engis UK Ltd. EUROPEAN OPERATIONS

Engis®

ENGIS® CORPORATION
World Leader in Superabrasive Finishing Systems
105 W. Hintz Road • Wheeling, IL, 60090
Phone: 847/808-9400
Fax: 847/808-9430 • E-Mail: info@engis.com
Website: www.engis.com

HYTDS0059R01